

DIAPER SHIRT: DIRECTIONS

1. CUT OUT TWO FRONTS/ ONE BACK PIECE ON FOLD
2. WITH RIGHT SIDES TOGETHER, SEW BACK TO FRONT ALONG THE UNDERARM-SIDE SEAM. SEAM ALLOWANCES ARE ONE-QUARTER INCH. CLIP SEAM ALLOWANCES AT UNDERARM. (OPTIONAL: FINISH SEAM ALLOWANCES)
3. WITH DOUBLE-FOLD BIAS TAPE OR SERGING, FINISH
 - (A) THE BOTTOM EDGE OF SLEEVE
 - (B) THE BACK NECKLINE
 - (C) THE FRONT EDGE FROM THE SHOULDER SEAM DOWN THE FRONT EDGE/AROUND THE BOTTOM EDGE/ACROSS SHIRT BACK BOTTOM EDGE/AROUND FRONT SHIRT BOTTOM EDGE/ UP FRONT EDGE OF 2ND FRONT EDGE/ UP TO THE SHOULDER SEAM
4. SEW THE SHOULDER SEAM. (OPTIONAL: FINISH SEAM)
5. ATTACH VELCRO OR RIBBON TIES AT THE FRONT ONE OR TWO FASTENERS, YOUR CHOICE.
6. PRESS.

DIAPER SHIRT

FRONT


(CUT 2)

grain

VELCRO

VELCRO

$\frac{1}{4}$ " seam allowances included

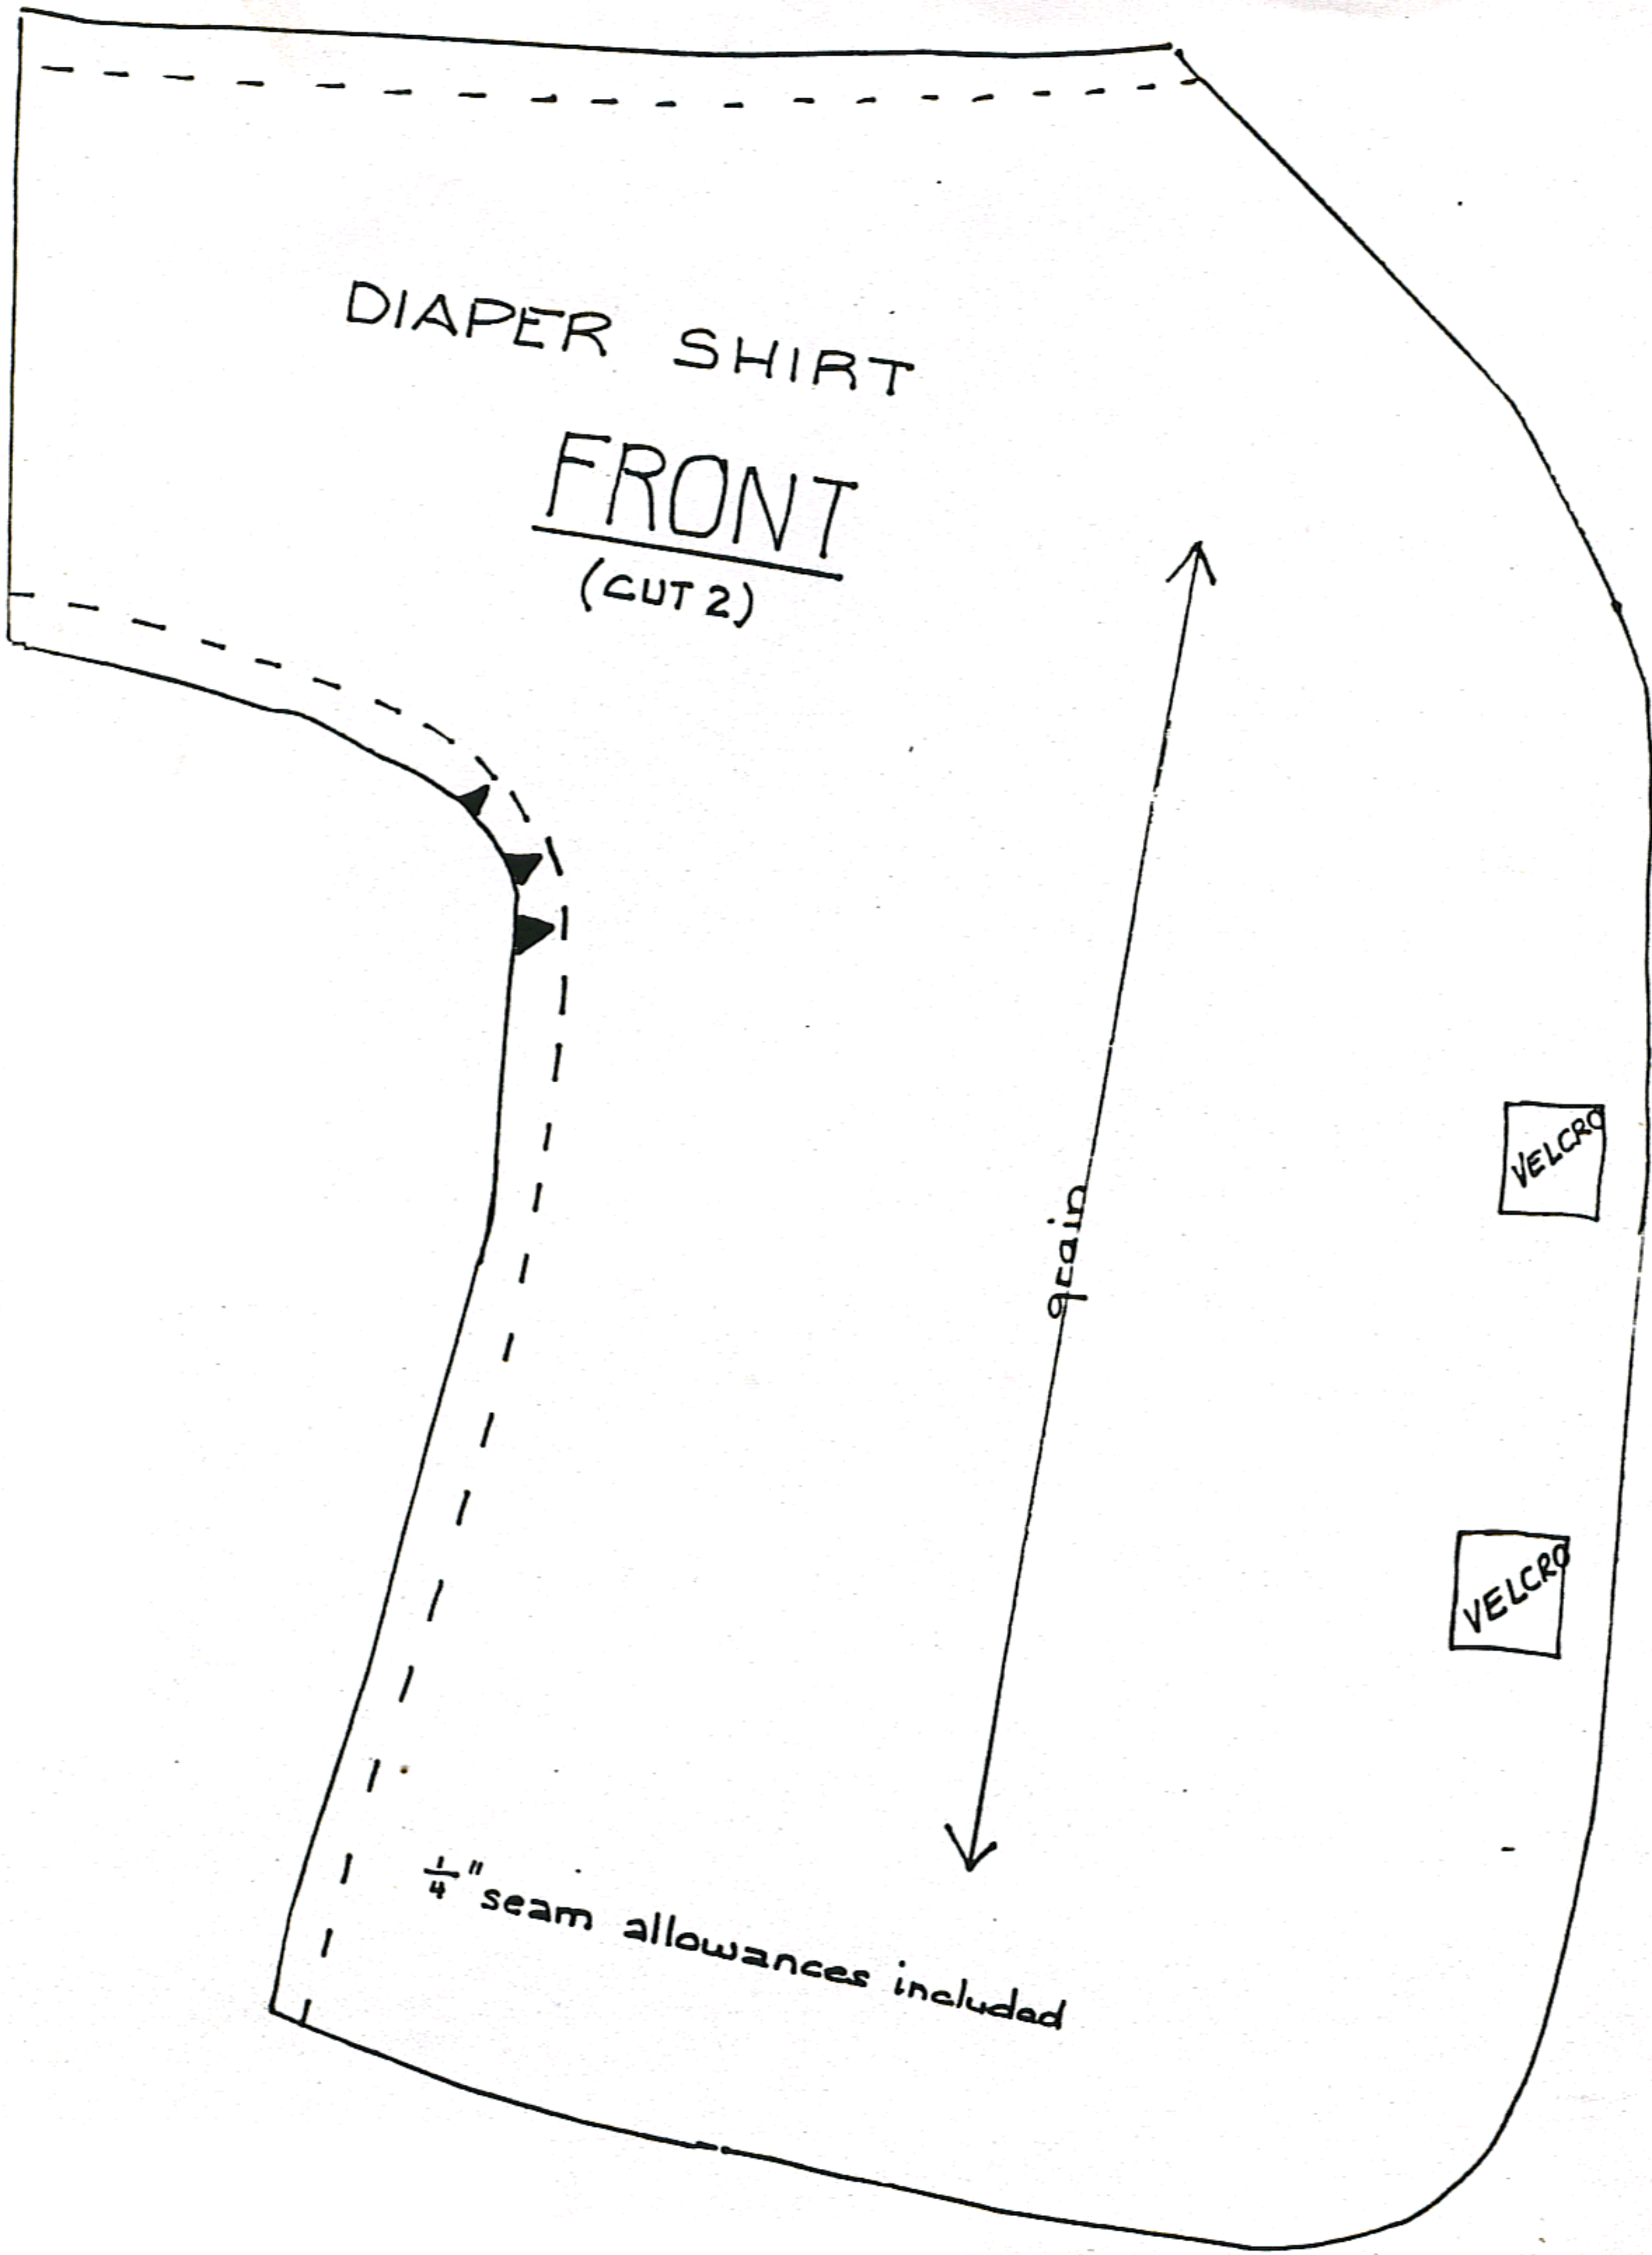

DIAPER SHIRT

BACK

CUT ONE ON FOLD

($\frac{1}{4}$ " seam allowances)

PLACE ON FOLD
-CENTER BACK-

CLIP

